








3/8" □

	Nr katalogowy	D mm	d mm	id mm	L mm	t mm	T mm	 kg	Ilość wypustów
KM0	1-KM0	22	22	18,1	57	5	44	0,11	4
KM1	1-KM1	28	22	22,2	57	5	44	0,11	4

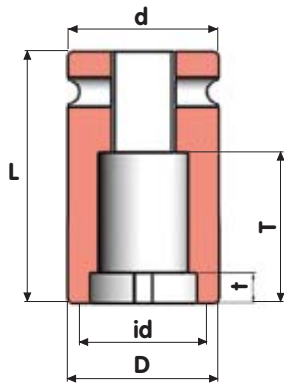

1/2" □


	Nr katalogowy	D mm	d mm	id mm	L mm	t mm	T mm	 kg	Ilość wypustów
KM2	4-KM2	33	30	25,2	82	6	61	0,27	4
KM3	4-KM3	36	30	28,2	82	6	61	0,24	4
KM4	4-KM4	38	32	32,2	82	9	58	0,28	4
KM5	4-KM5	46	39	38,2	82	9	58	0,38	4
KM6	4-KM6	53	45	45,2	82	9	58	0,42	4
KM7	4-KM7	60	49	52,2	82	9	58	0,47	4
KM8	4-KM8	68	59	58,3	82	9	58	0,61	4

3/4" □

	Nr katalogowy	D mm	d mm	id mm	L mm	t mm	T mm	 kg	Ilość wypustów
KM9	2-KM9	73,5	44	65,4	90	13,5	62	0,80	4
KM10	2-KM10	78,5	44	70,4	90	13,5	62	0,90	4
KM11	2-KM11	83,5	44	75,4	90	13,5	62	0,90	4
KM12	2-KM12	88,5	44	80,4	90	13,5	60	1,04	4
KM13	2-KM13	94	44	85,4	90	13,5	60	1,12	4

1" □


	Nr katalogowy	D mm	d mm	id mm	L mm	t mm	T mm	 kg	Ilość wypustów
KM14	9-KM14	103	76	92,5	110	12	74	2,13	4
KM15	9-KM15	109	76	98,5	110	13	74	2,24	4
KM16	9-KM16	116	76	105,6	110	15	74	2,35	4
KM17	9-KM17	121	76	110,6	110	16	74	2,50	4
KM18	9-KM18	131	76	120,6	110	16	74	2,72	4
KM19	9-KM19	137	76	125,6	110	17	74	3,01	4
KM20	9-KM20	143	76	130,6	110	18	74	3,24	4






Dessa hylsor för kullager-muttrar ersätter haknycklar och gör det möjligt att använda mutterdragare eller momentnyckel.



These sockets for axial nuts replace hook spanners making the use of power tools or torque wrenches possible.

Steckschlüssel für Wellenmuttern ersetzen Haken-schlüssel und ermöglichen den Einsatz von Schraubern oder Drehmomentschlüsseln.

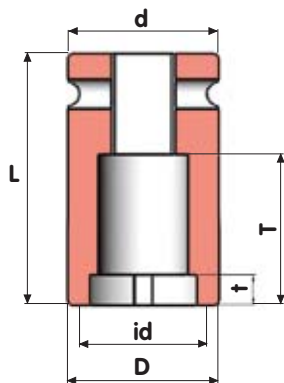

3/8" □

	Nr katalogowy	D mm	d mm	id mm	L mm	t mm	T mm	 kg	Ilość wypustów
GU0	1-GU0	22	22	18,1	57	8	44	0,10	4
GU1	1-GU1	26	22	21,2	57	8	44	0,11	4



1/2" □


	Nr katalogowy	D mm	d mm	id mm	L mm	t mm	T mm	 kg	Ilość wypustów
GU2	4-GU2	30	30	24,2	82	10	61	0,24	4
GU3	4-GU3	34	30	28,2	82	10	61	0,24	4
GU4	4-GU4	38	30	32,2	82	15	58	0,28	4
GU5	4-GU5	46	30	38,2	82	15	58	0,38	4
GU6	4-GU6	52	30	44,2	82	15	58	0,42	4
GU7	4-GU7	59	30	50,2	82	15	58	0,45	4
GU8	4-GU8	66	30	56,3	82	15	58	0,61	4

3/4" □

	Nr katalogowy	D mm	d mm	id mm	L mm	t mm	T mm	 kg	Ilość wypustów
GU9	2-GU9	71	60	62,4	90	18	62	0,80	4
GU10	2-GU10	77	65	68,4	90	18	62	0,87	4
GU11	2-GU11	84	70	75,4	90	18	62	0,92	6
GU12	2-GU12	89	75	80,4	90	18	60	1,00	6
GU13	2-GU13	94	80	85,4	90	18	60	1,09	6

1" □



	Nr katalogowy	D mm	d mm	id mm	L mm	t mm	T mm	 kg	Ilość wypustów
GU14	9-GU14	103	76	92,5	110	22	74	2,20	6
GU15	9-GU15	109	76	98,5	110	22	74	2,30	6
GU16	9-GU16	116	76	105,6	110	22	74	2,45	8
GU17	9-GU17	121	76	110,6	110	22	72	2,60	8
GU18	9-GU18	131	76	120,6	110	22	72	2,90	8
GU19	9-GU19	137	76	125,6	110	22	72	3,05	8
GU20	9-GU20	143	76	130,6	110	22	70	3,30	8




Dessa hylsor för kullagermutterar ersätter haknycklar och gör det möjligt att använda mutterdragare eller momentnyckel.


These sockets for axial nuts replace hook spanners making the use of power tools or torque wrenches possible.

Steckschlüssel für Wellenmuttern ersetzen Haken-schlüssel und ermöglichen den Einsatz von Schraubern oder Drehmomentschlüsseln.


1" □



Nr katalogowy		D mm	d mm	L mm	t mm	T mm	 kg
1 1/2	9-C1 1/2	59,5	36	54	65	35	0,80
1 3/4	9-C1 3/4	69,5	42	54	65	35	1,00
2	9-C2	79	48	62	65	35	1,35
2 1/4	9-C2 1/4	89	58	62	65	35	1,50
2 1/2	9-C2 1/2	99	64,5	62	65	35	1,70
2 3/4	9-C2 3/4	108	71	76	71	40	2,40
3	9-C3	121	77	76	77	46	3,20
3 1/2	9-C3 1/2	140	90	76	91	60	4,80
4	9-C4	159	103	76	91	60	5,60
4 1/2	9-C4 1/2	178	116	76	102	70	8,70


1 1/2" □

Nr katalogowy		D mm	d mm	L mm	t mm	T mm	 kg
1 1/2	5-C1 1/2	59,5	36	84	80	39	2,00
1 3/4	5-C1 3/4	69,5	42	84	80	39	2,20
2	5-C2	79	48	84	80	39	2,30
2 1/4	5-C2 1/4	89	58	86	80	35	2,30
2 1/2	5-C2 1/2	99	64,5	86	80	35	2,50
2 3/4	5-C2 3/4	108	71	86	83	38	3,00
3	5-C3	121	77	86	88	43	3,90
3 1/2	5-C3 1/2	140	90	102	100	55	6,20
4	5-C4	159	103	102	100	55	7,40
4 1/2	5-C4 1/2	178	116	102	108	63	9,40
5	5-C5	194	128	102	108	63	10,50
5 1/2	5-C5 1/2	221	141	102	110	65	13,60

2 1/2" □


Nr katalogowy		D mm	d mm	L mm	t mm	T mm	 kg
2	6-C2	79	48	137	90	38	6,20
2 1/4	6-C2 1/4	89	58	137	98	38	6,30
2 1/2	6-C2 1/2	99	64,5	137	98	38	6,50
2 3/4	6-C2 3/4	108	71	137	98	38	6,60
3	6-C3	121	77	137	100	40	6,90
3 1/2	6-C3 1/2	140	90	137	105	45	7,18
4	6-C4	159	103	137	115	55	8,90
4 1/2	6-C4 1/2	178	116	160	120	60	12,80
5	6-C5	194	128	160	130	70	14,70
5 1/2	6-C5 1/2	221	141	160	135	75	18,30
6	6-C6	235	154	160	140	70	22,10
6 1/2	6-C6 1/2	252	167	160	145	75	25,40
7	6-C7	270	181	160	150	80	29,30

3 1/2" □


Nr katalogowy		D mm	d mm	L mm	t mm	T mm	 kg
3 1/2	12-C3 1/2	140	90	195	145	60	20,20
4	12-C4	159	103	195	145	60	20,40
4 1/2	12-C4 1/2	178	116	195	150	65	20,90
5	12-C5	194	128	195	150	65	20,70
5 1/2	12-C5 1/2	221	141	195	175	65	28,10
6	12-C6	235	154	195	180	70	30,30
6 1/2	12-C6 1/2	252	167	195	185	75	34,10
7	12-C7	270	181	195	190	80	38,30

